

STUDY SUMMARY

MOISTURE NO. 103

Exterior Foundation Wall Insulation.

The impact of moisture absorption on the performance of polystyrene foam insulations used for below grade applications is an important design consideration. It has been scientifically proven that water absorption into polystyrene foam insulations will diminish R-values.

This Study Summary provides the results of a research project conducted from 1980 to 1983 by Hoechst Corporation. The objective of the study was to survey the performance of below grade insulation 3 years after initial installation.

Expanded polystyrene and extruded polystyrene (XPS) insulation samples were removed from the foundation of commercial building located in Leominster, MA. The foundation was a poured twelve-inch concrete wall extending six feet below grade. The inside was dirt filled thus eliminating the influence of heat-flux through the wall.

Summary of Study Test Results

Material	ASTM C578 Type	R-value (°F·ft ² ·h/Btu)		R-value Loss (%)
		Prior to Installa-	After Removal	
Expanded Polystyrene	I	3.74	3.60	3.7
Expanded Polystyrene	VIII	4.15	4.16	0.0
Expanded Polystyrene	II	4.46	4.40	1.3
Expanded Polystyrene	IX	4.31	4.30	0.2
Expanded Polystyrene	XIV	4.49	4.37	2.6
XPS	IV	5.01	4.75	5.2

The expanded polystyrene samples have a slightly higher R-value retention than the XPS, but overall the results demonstrate that R-value retention for expanded polystyrene and XPS samples are comparable.


The slight reductions in R-value are anticipated to be primarily from moisture absorption, however it is possible that the greater loss in R-value for the XPS may have been partially due to the loss of blowing agents which diffuse out of the XPS over time.

These results suggest very clearly that short term laboratory tests of water absorption for expanded polystyrene and XPS do not necessarily reflect the long term below grade performance of these materials.



FOAM FACTS:

Below Grade R-value

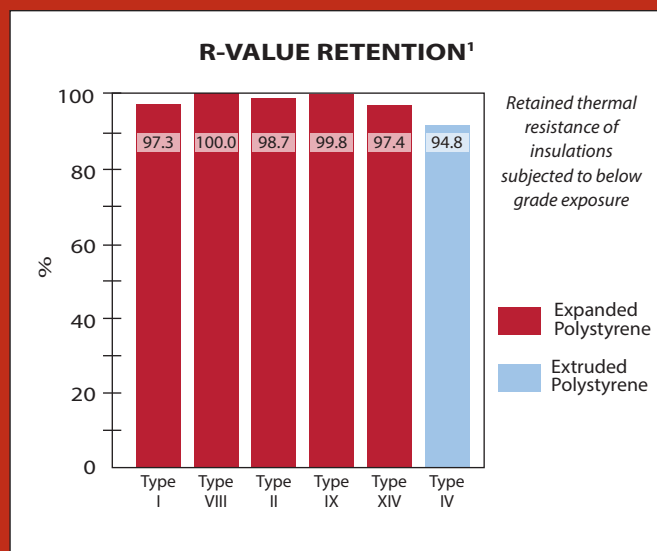

¹ Testing was conducted by Hoechst Corporation.

A PRODUCT OF
PREMIER
BUILDING SYSTEMS

www.rshieldinsulation.com | 800-766-3626

Copyright © 2022. R-Shield is a registered trademark of Premier Building Systems. RSI MS103 08/22